

T-41-39

# LM213XB

- 256 dot(W) x 64 dot(H) graphic and alpha-numeric display
- Controller LSI HD61830 is built-in
- Color tone: Yellowgreen

## MECHANICAL DATA (Nominal dimensions)

Module size . . . . . 184W x 75H x 12T (max.) mm  
 Effective display area . . . . . 149.6W x 43H mm  
 Number of dots . . . . . 256W x 64H mm  
 Dot size . . . . . 0.51W x 0.51H mm  
 Dot pitch . . . . . 0.56W x 0.56H mm  
 Weight . . . . . about 150 g

## ABSOLUTE MAXIMUM RATINGS

	min.	max.
Power supply for logic ( $V_{DD}-V_{SS}$ )	0	6.5 V
Power supply for LCD drive ( $V_{DD}-V_{EE}$ )	0	16.0 V
Input voltage ( $V_I$ )	$V_{SS}$	$V_{DD}$
Operating temperature ( $T_a$ )	0	40°C
Storage temperature ( $T_{stg}$ )	-20	60°C



## ELECTRICAL CHARACTERISTICS

$T_a = 25^\circ\text{C}$ ,  $V_{DD} = 5.0 \text{ V} \pm 0.25 \text{ V}$ ,  $V_{EE} = -10.5 \text{ V} \pm 0.25 \text{ V}$   
 Operating internal frequency  $F_{CP1}$  . . . . . 500 kHz  
 $F_{CP2}$  . . . . . 1.2 MHz  
 Power consumption . . . . . 250 mW  
 Power supply current ( $I_{DD}$ ) . . . . . 35 mA typ.  
 ( $I_{EE}$ ) . . . . . 2 mA typ.  
 Power supply for LCD drive (Recommended) ( $V_{DD} - V_O$ )  
 Duty = 1/64  
 $T_a = 0^\circ\text{C}$  . . . . . 14.5 V typ.  
 $T_a = 25^\circ\text{C}$  . . . . . 13.7 V typ.  
 $T_a = 40^\circ\text{C}$  . . . . . 13.2 V typ.

OPTICAL DATA . . . . . See page 5

## INTERFACE TABLE

Pin No.	Symbol	Pin No.	Symbol
1	$V_{SS}$ (GND)	11	DB4
2	$V_{DD}$	12	DB5
3	$V_O$	13	DB6
4	RS	14	DB7
5	R/W	15	$\bar{CS}$
6	E	16	$\bar{RES}$
7	DB0	17	$V_{EE}$
8	DB1	18	N.C
9	DB2	19	N.C
10	DB3	20	N.C

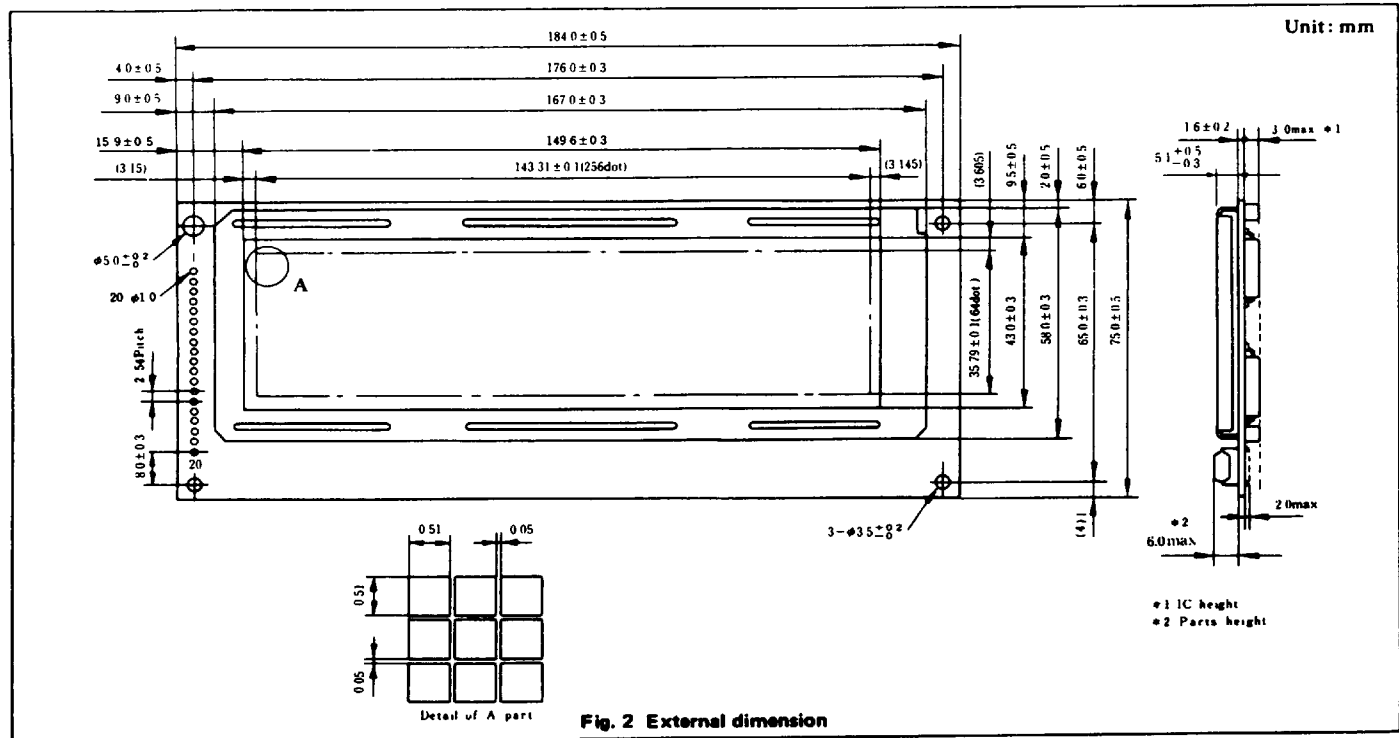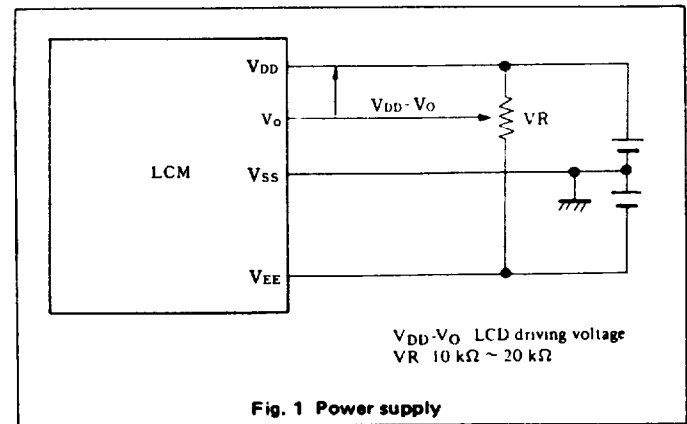

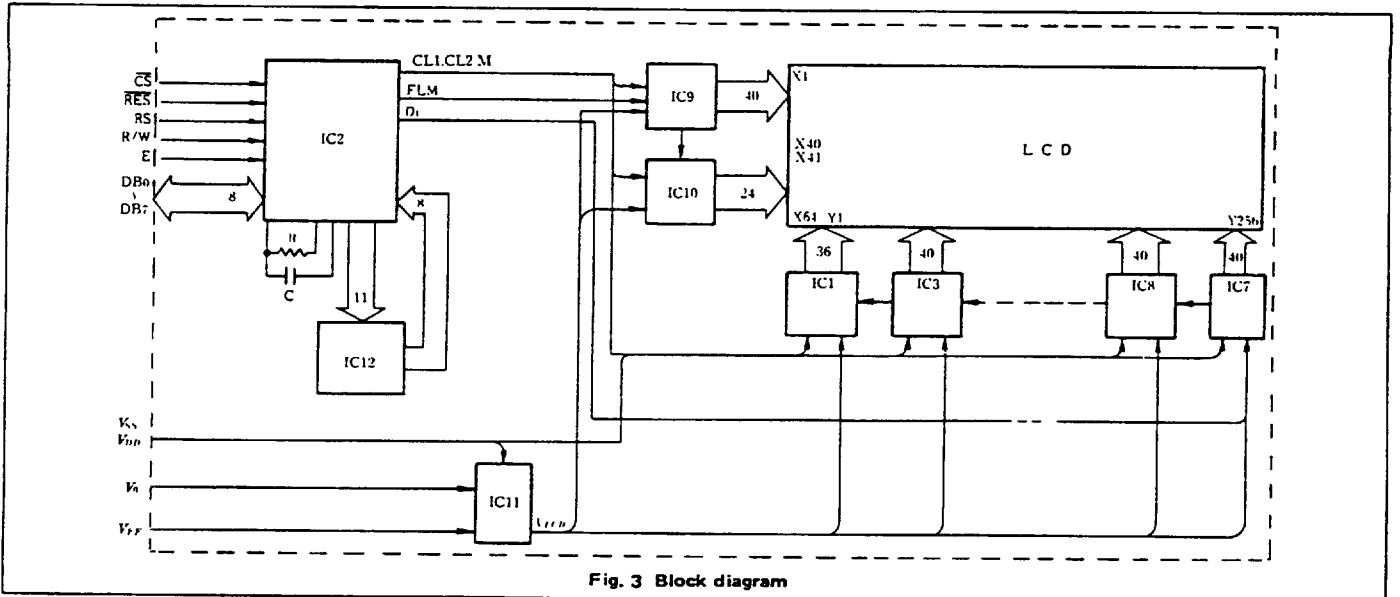


Fig. 3 Block diagram

**TIMING CHARACTERISTICS**

Item	Symbol	Min.	Typ.	Max.	Unit
Cycle time of 'E'	$t_{CYC}$	1.0	—	—	$\mu s$
Pulse width of 'E'	H level	$t_{WEH}$	0.45	—	$\mu s$
	L level	$t_{WEL}$	0.45	—	$\mu s$
Pulse raise time of 'E'	$t_{Er}$	—	—	25	ns
Pulse fall time of 'E'	$t_{Ef}$	—	—	25	ns
Set up time of CS, R/W, RS	$t_{AS}$	140	—	—	ns
Set up time of Input Data	$t_{DIS}$	225	—	—	ns
Data delay time	$t_{DD}$	—	—	225	ns
Hold time of Data	$t_H$	10	—	—	ns
Hold time of CS, R/W, RS	$t_{AS}$	10	—	—	ns

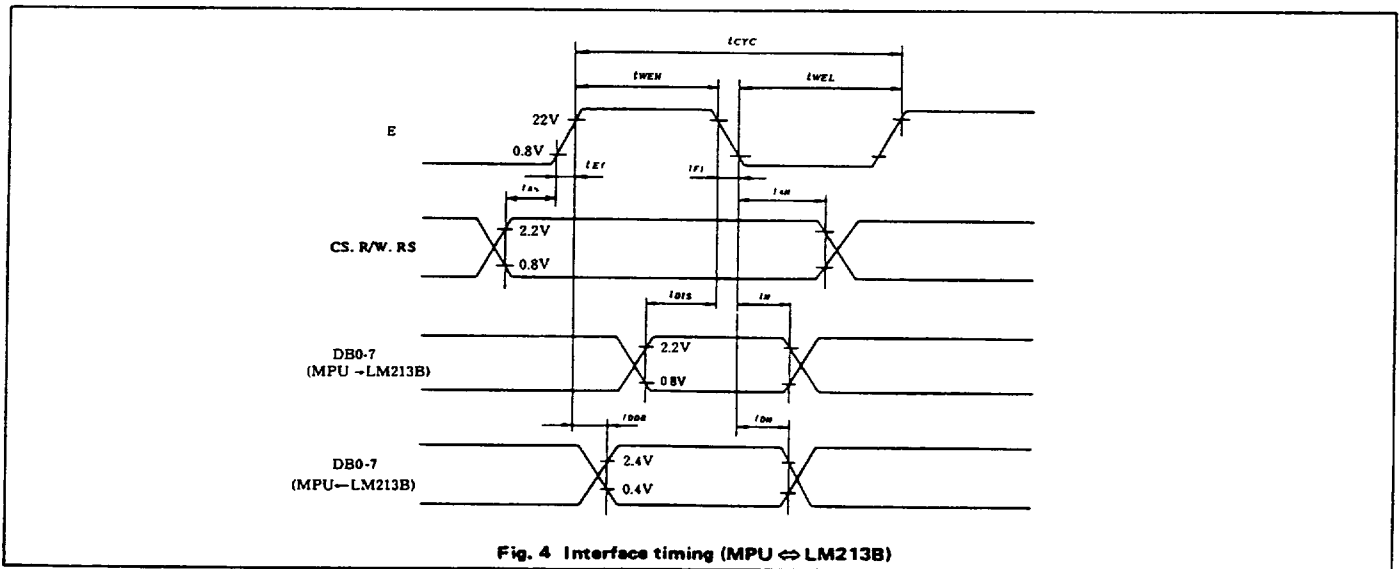


Fig. 4 Interface timing (MPU ↔ LM213B)